













RS232-Interface and MultiFunctionRelay Module XSP11R










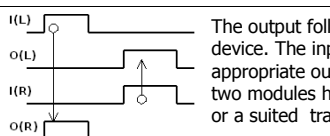
The interface module offers a simple method to connect and control up to eight digital inputs and outputs through a serial RS232 port. Since inputs and outputs are separated from the remaining circuitry by optical couplers, signals of industrial controls can be easily connected to a PC or a terminal or other devices with serial RS232 ports. The digital inputs are designed for 24VDC. The outputs will be switched via potential-free, normally open contacts (PCN-124D3) with a switching capacity of 3A @ 24VDC or 3A @ 250VAC. Logic and decoupled outputs may be separately powered. The component is easy-to-mount on common used mounting rails. The electrical connection of digital inputs and outputs is made by pluggable cage clamp terminals.

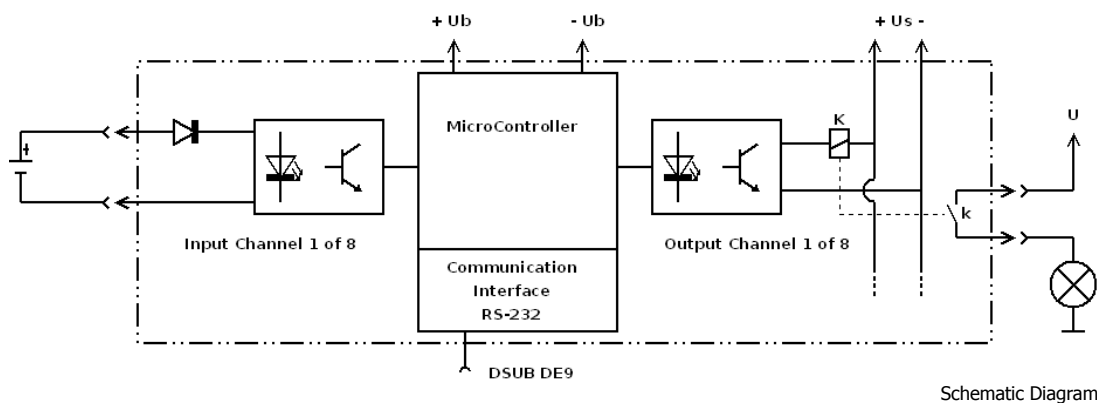
Technical Data	
Digital Inputs (8) I0 .. I7 Voltage Current Trigger Level	Optical couplers 0 .. 30VDC per input channel 4mA @ 24VDC approx. 4VDC
Digital Outputs (8) O0 .. O7 Contact Rating Minimum Contact Load Mechanical Endurance	Relays, PCN-124D3MHZ (Coil 24VDC) by Tyco 3A @ 30VDC, 3A @ 250VAC 1mA / 5VDC min. 20 x 10 ⁶ cycles
Supply - Logic (Ub) Voltage Current Power Consumption	Rated Voltage 24VDC 8 .. 30VDC 12mA @ 24VDC 280mW @ 24VDC
Supply - Relays (Us) Voltage Current	Rated Voltage 24VDC 18 .. 30VDC Number of activated relays x 6.2mA @ 24VDC (max 50mA @ 24VDC)
Status Indicators Inputs (8) Outputs (8) Supply (1) Heart-Beat (1) Command (1)	LED indicates an input voltage >2V LED, connected to the relay coil, indicates the 'ON' state LED indicates presence of supply voltage (Logic) LED flashes (Normal: 1Hz, Programming: 2.5Hz, Remote: 0.5Hz) LED flashes at receipt of a known command
Module Identification	Besides the possibility, to assign an individual name, each module contains a unique, unalterable, 12-digit serial number in hexadecimal notation.
Dimensions	100mm(L) x 22,5mm(B) x 120mm(H) Outer packaging: 180mm(L) x 165mm(B) x 50mm(H)
Fixing	Click-on mounting rail TS35
Mounting Position	Any desired
Weight	0,175kg
Protecting Type	IP20
Ambient Conditions	-5 ° C ... +65 ° C under normal installation conditions (cabinet). In constricted spaces a sufficient ventilation (forced air flow) or any other cooling method is necessary. In outdoor activities the module should be protected with a suitable housing, furthermore with protection against direct sunlight, frost and condensation.
RoHS - Conformity	The relevant directives will be observed. However, no own analysis will be carried out. We trust the related statements of suppliers.
Certifications	CE in preparation
Communication Parameters (fixed)	9600bps, 8 data bit, 1 stop bit, no parity

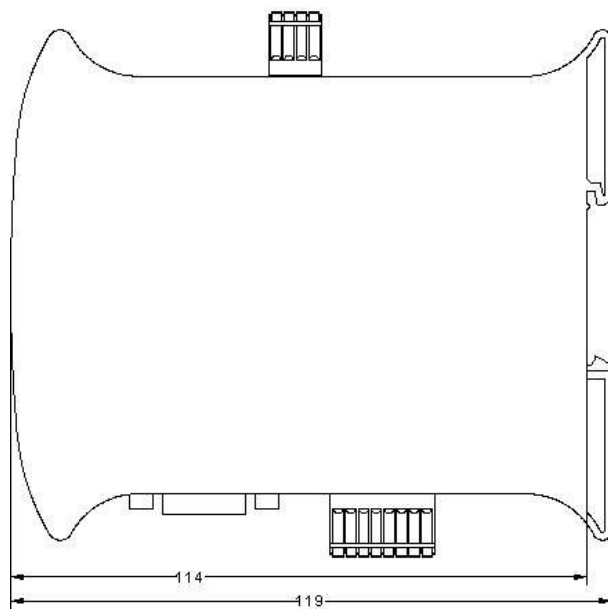
Technical Data	
Technology	Microcontroller and discrete components placed on double-layer PCB. By means of an integrated bootloader, the existing firmware can be updated at any time via the communication interface.
Connectors Supply Inputs/Outputs RS232	Pluggable Connectors Pin Header 4pol MCV 0,5/ 4-G-2,5 Pin Header 8pol MCV 0,5/ 8-G-2,5 DSUB9-Socket DE9S (Locking Thread UNC 4/40)
Delivery Contents	MFR-Module (configured as I/O-Interface for 8 Channels) 4 Connector 8pol (FK-MC 0,5/8-ST-2,5) 1 Connector 4pol (FK-MC 0,5/4-ST-2,5) CD 'MFR Tools' Operating Instructions
Customs Tariff Number (TARIC)	85364110
Country of Origin	Germany
<div style="border: 2px solid red; padding: 10px;">  <p>Safety Notes This product is not fail-safe and should not be used in life-supporting systems and other applications which are critical for safety, without a new risk assessment and evaluation of the conformity! If the module is intended to be installed into a machine or a system, for which the EC machinery directive 98/37 or its amendment is valid, it is necessary to make sure that the product, after its application, complies with all relevant regulations.</p> </div>	

Pin Assignment											
MCV .. 4 / 8		X6		X4		X5		X2		X3	
		+	Logic Ub		Output O0		Output O4	-	Input I3	-	Input I7
		-						+			
		+	Relays Us		Output O1		Output O5	-	Input I2	-	Input I6
		-						+			
					Output O2		Output O6	-	Input I1	-	Input I5
								+		+	
					Output O3		Output O7	-	Input I0	-	Input I4
								+		+	
DSUB DE9S				X1							
				2	TxD Transmitted Data						
				3	RxD Received Data						
				5	Gnd Ground 0V						

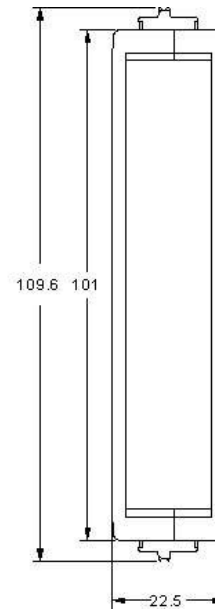
Functions	
<p>The following functions pertain to each one channel, ie each of the existing eight channels can perform a different function. The functions can be combined. In any case, all input and output signals will transferred to the master control unit via the communication interface, regardless if they will received and evaluated. The module can be used as a pure serial interface for processing of inputs and outputs, or operated as stand-alone multi-functional and multi-channel relay or in combination..</p> <p>The times are derived by a divider from a 8-MHz crystal. The accuracy should be sufficient for most technical processes</p>	
I/O – Interface (Factory default settings)	Inputs I0 .. I7 are read and Outputs O0 .. O7 are controlled by an external unit via the existing communication port. All timing functions are suspended.
Direct	 <p>The output directly follows the input. All timing functions are suspended.</p>
On-Delay	 <p>Applying a voltage to the input, the output will be active after the configured delay t1. With removing the input voltage the output will be immediately inactive.</p>
Off-Delay	 <p>Applying a voltage to the input, the output will be active immediately. With removing the input voltage, the output will be inactive after the configured delay t1. The delay is only guaranteed if during this time, the supply voltage of the module is maintained.</p>

Functions	
Clock Pulse / Pause	 <p>The output acts as clock generator. Either free-running or controlled via a corresponding input. The duration of pulse t1 and pause t2 is configurable.</p>
Clock Pulse / Cycle	 <p>The output acts as clock generator. Either free-running or controlled via a corresponding input. The duration of pulse t1 and cycle t2 is configurable.</p>
Switching-On Wipe Pulse	 <p>On applying a voltage to the input, the output generates a single pulse of configurable duration t1, independent from the duration of the input signal.</p>
Switching-Off Wipe Pulse	 <p>On removing the voltage from an input, the output generates a single pulse of configurable duration t1. The pulse duration is only guaranteed if during this time, the supply voltage of the module is maintained.</p>
Remote Terminal Unit (RTU)	 <p>The output follows the appropriate input of the remote device. The input of this channel is transferred to the appropriate output of the remote device. For this mode, two modules have to be connected via a 'crossed' cable or a suited transmission path (modem).</p>
Selection of Functions and Timing Values	By means of the supplied setup program (Windows), the functions and timing values can be changed.
Timer / Time Ranges Milliseconds Seconds Minutes Hours	Derived from 8-MHz-Quartz, I/O-Cycle 100ms 100 .. 2000 milliseconds in steps of 100 milliseconds 1 .. 120 seconds in steps of 1 second 1 .. 120 minutes in steps of 1 minute 1 .. 100 hours in steps of 1 hour





Dimensions (mm)

**ZEB Automation Limited**

Wakefield, West Yorkshire, GB

Branch Office Germany

Obentrautstr. 35, D-10963 Berlin

Fon +49 30 6212667 * Fax +49 30 25294347 * eMail info@zeb-automation.com

Any technical changes are reserved and performed without further notice.

Published illustrations and general data are noncommittal.

Issue 11/2011 (xsp11r_td_en)